



## W2600 Series 2.54mm Wafer

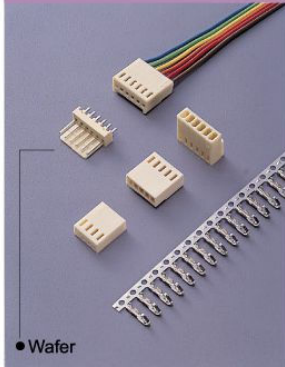

W
2600
—
02
P
S
Y
T
C
0

- |   |  |   |
|---|--|---|
| <p>1. PRODUCTS:<br/>W:Wafer</p> <p>2. SERIES NO.:<br/>2600</p> <p>3. CONTACT NO.:<br/>02-20</p> | <p>4. CONTACT TYPE:<br/>P:Non Distribution</p> <p>5. FUNCTION:<br/>S: Straight<br/>R: Right Angle<br/>C: Reverse Right Angle</p> <p>6. BODY OPTION:<br/>Y: With Back<br/>N: Without Back</p> | <p>7. CONTACT PLATING:<br/>T: Tin<br/>S: Selective Gold<br/>G: Gold Flash</p> <p>8. INSULATOR COLOR:<br/>W: White (UL94V-0)<br/>C: Beige (UL94V-2)</p> <p>9. FILL IT WITH "0"</p> |
|---|--|---|

### 1 W2600-XXPCYTC0R 2.54mm WAFER REVERSE 90° WITH LOCKING RIBS (V2)

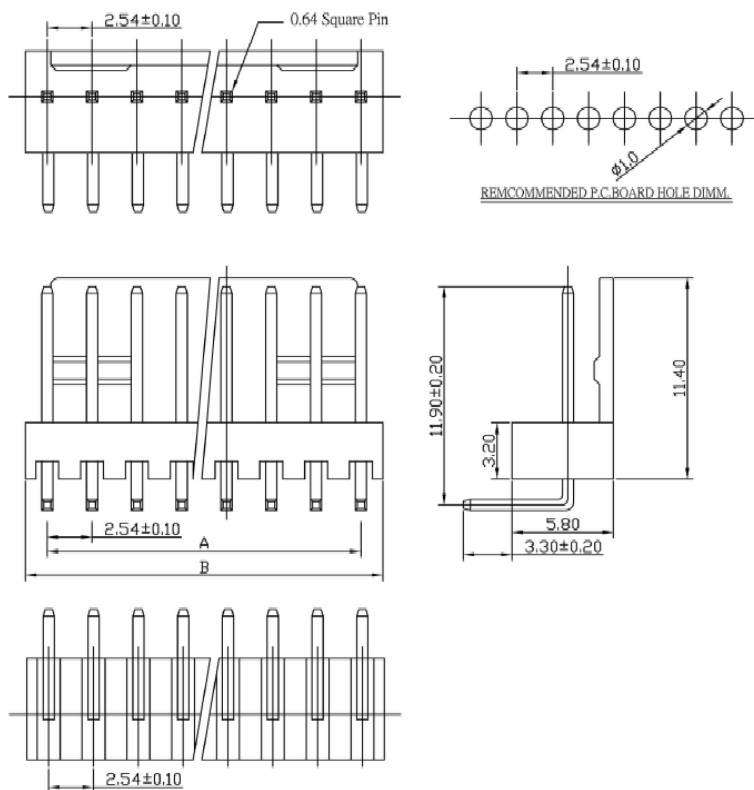

#### FEATURES AND SPECIFICATIONS

Features and Benefits  
Size 2 to 20 circuits

Electrical  
Current Rating: 2A AC, DC  
Voltage Rating: 250V AC/ max.  
Insulation Resistance: 1000M $\Omega$ / min.  
Dielectric Withstanding Voltage: 1500V AC/ min.  
Contact Resistance: 10m $\Omega$ / max.  
Operating Temp: -25°C ~ +85°C

Physical  
Material: Nylon 66, UL94V-2  
Terminal Material: Brass/ Tin-plated/ Gold-plated  
Packing: Bag

Poles	Dimension mm (in.)	
	A	B
2	2.54(0.100)	5.12(0.202)
3	5.08(0.200)	7.66(0.302)
4	7.62(0.300)	10.20(0.402)
5	10.16(0.400)	12.74(0.502)
6	12.70(0.500)	15.30(0.602)
7	15.24(0.600)	17.94(0.706)
8	17.78(0.700)	20.48(0.806)
9	20.32(0.800)	23.02(0.906)
10	22.86(0.900)	25.58(1.007)
11	25.40(1.000)	28.12(1.107)
12	27.94(1.100)	30.68(1.208)
13	30.48(1.200)	33.10(1.303)
14	33.02(1.300)	35.80(1.409)
15	35.56(1.400)	38.34(1.509)
16	38.10(1.500)	40.94(1.612)
17	40.64(1.600)	43.30(1.705)
18	43.18(1.700)	45.90(1.807)
20	48.26(1.900)	50.80(2.000)

ELECTRONIC COMPONENTS