







DEGSON ELECTRONICS CO., LTD.

Product Specification

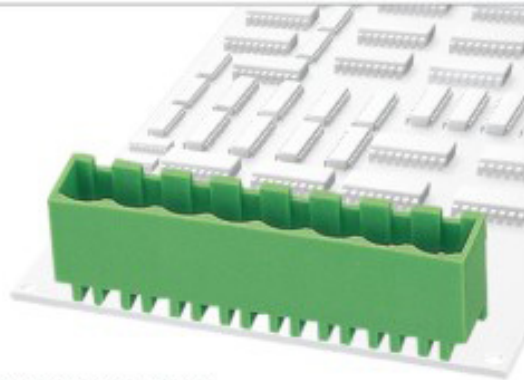


2EDGVC-5.0 2EDGVC-7.5
2EDGVC-5.08 2EDGVC-7.62

NX7.62
 NX7.50
 NX5.08+1.40
 NX5.00+1.40

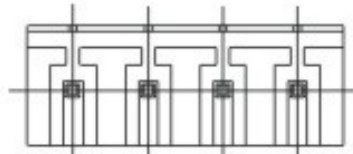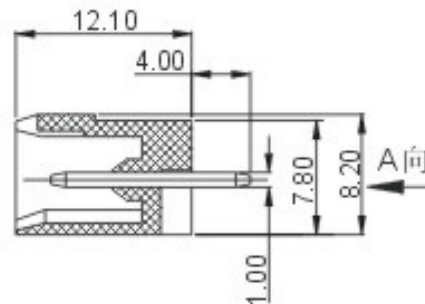


A向视图



PCB LAYOUT

Approval		
Electrical		
Standard	UL	IEC
Rated voltage	300V	320V,400V
Rated current	15A	20A
With standing voltage	AC 2500V/1 Min	
Mechanical		
Ambient temperature	-40°C~+105°C	
Dimensions		
Pitch	5.0mm (.197") 5.08mm (.200") 5.5mm (.216") 5.62mm (.221")	
Poles	2P-24P	2P-12P
Material		
Housing	PA66, UL94V-0	
Pin header	Brass, Tin plated	

HOW TO ORDER

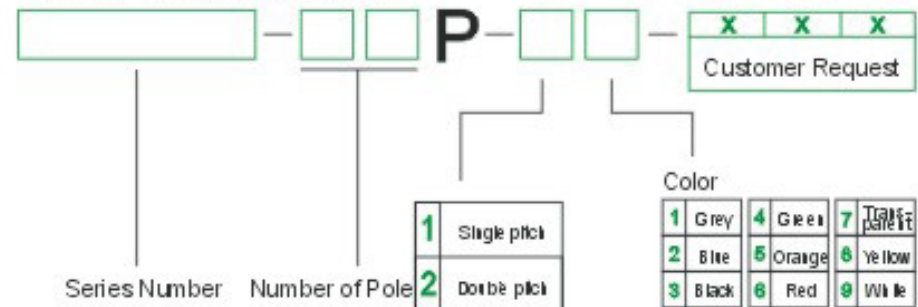

	DEGSON ELECTRONICS CO., LTD.
	NAME 2EDGVC-5.0 2EDGVC-7.5 2EDGVC-5.08 2EDGVC-7.62