



C3130 Series 2.54mm Micro-Match Connector (Male on Board Vertical Type)

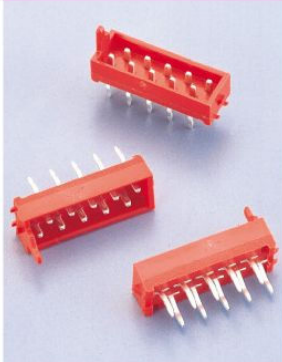

C	3130	—	10	P	T	R	0	0	0
1	2		3	4	5	6	7	8	9

- | | | |
|--|--|--|
| <p>1. PRODUCTS:
C: Connector</p> <p>2. SERIES NO.:
3130</p> <p>3. CONTACT NO.:
04-26</p> <p>4. CONTACT MATERIAL:
P: Phosphor Brass</p> | <p>5. CONTACT PLATING:
T: Tin
S: Selective Gold
G: Gold Flash
A: Gold 5U"
B: Gold 10U"
C: Gold 15U"
D: Gold 30U"</p> <p>6. INSULATOR COLOR:
R: Red</p> | <p>7. FILL IT WITH "0"</p> <p>8. FILL IT WITH "0"</p> <p>9. FILL IT WITH "0"</p> |
|--|--|--|

1 C3130-XXPXR000R 2.54mm MINI SIZE CONNECTOR MALE ON BOARD VERTICAL TYPE XXP PHOSPHOR BRASS RED INSULATOR



POSITION	A	B
4	8.46	3.81
6	11.00	6.35
8	13.54	8.89
10	16.08	11.43
12	18.62	13.97
14	21.16	16.51
16	23.70	19.05
18	26.24	21.59
20	28.78	24.13
22	31.32	26.67
24	33.86	29.21
26	36.40	31.75




SPECIFICATIONS

Material


Insulator: PBT glass reinforced, rated UL 94V-0
Contact: Phosphor Bronze

Electrical

Current Rating: 1 Amp
Contact Resistance: 30 mΩ max.
Insulation Resistance: 3000 MΩ min.
Dielectric Withstanding Voltage: 500V AC for 1 minute
Operating Temperature: -40°C to +105°C



RECOMMENDED P.C. BLAYOUT



ELECTRONIC
COMPONENTS