






# DEGSON ELECTRONICS CO., LTD.

## Product Specification



**2EDGKBM-5.0 2EDGKBM-5.08**  
**2EDGKBM-7.5 2EDGKBM-7.62**

NX7.62-1.8  
 NX7.50-1.8  
 NX5.08  
 NX5.00

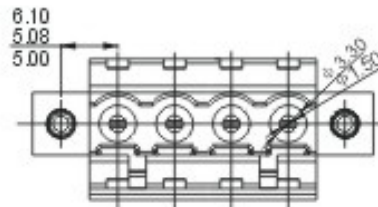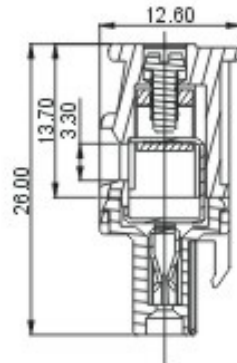


Approval	UL	VDE
<b>Electrical</b>		
Standard	UL	IEC
Rated voltage	300V	320V, 400V
Rated current	15A	10A
Wire range	28-12AWG	2.5mm <sup>2</sup>
With standing voltage	AC2500V/1Min	

<b>Mechanical</b>		
Torque	0.4N.m (3.5Lb-In.)	
Ambient temperature	-40°C~+105°C	
Strip length	7mm	

<b>Dimensions</b>		
Pitch	5.0mm (.197") 5.08mm (.200") 7.5mm (.295") 7.62mm (.300")	
Poles	2P-22P	2P-12P

<b>Material</b>	
Housing	PA66, UL94V-0
Screws	M2.5 steel, Cr <sup>3+</sup> Zn plated
Contact	Phosphor bronze
Cage	Brass, Ni plated

### HOW TO ORDER

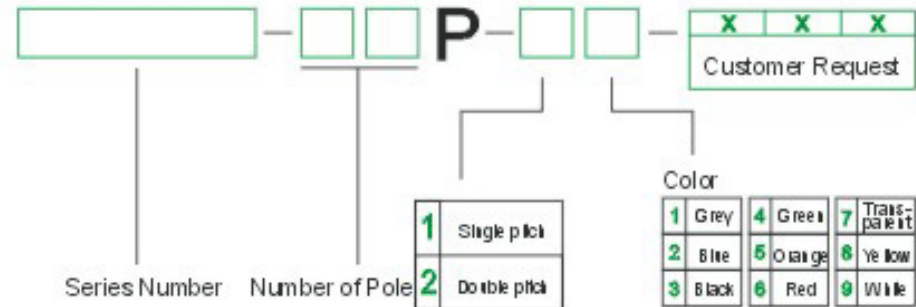

 	 <b>DEGSON ELECTRONICS CO., LTD.</b>
NAME	<b>2EDGKBM-5.0 2EDGKBM-5.08</b> <b>2EDGKBM-7.5 2EDGKBM-7.62</b>