


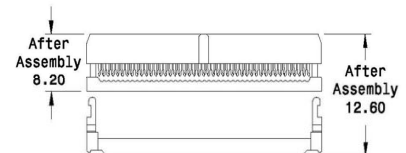


2

C9200-XXXYXB00R**9200-4PNNS1-1 IDC SOCKET 2.0mm X 2.0mm XXP W/ BUMP**

POSITION	A	B	C
6P	11.14	4.00	2.0
8P	13.14	6.00	2.0
10P	15.14	8.00	2.0
12P	17.14	10.00	2.0
14P	19.14	12.00	2.0
16P	21.14	14.00	2.0
18P	23.14	16.00	2.0
20P	25.14	18.00	2.0
22P	27.14	20.00	2.0
24P	29.14	22.00	2.0
26P	31.14	24.00	2.0
28P	33.14	26.00	2.0
30P	35.14	28.00	2.0
34P	39.14	32.00	2.0
36P	41.14	34.00	2.0
38P	43.14	36.00	2.0
40P	45.14	38.00	2.0
44P	49.14	42.00	2.0
48P	53.14	46.00	2.0
50P	55.14	48.00	2.0
60P	65.14	58.00	2.0
64P	69.14	62.00	2.0

**SPECIFICATIONS****Material**

Insulator : PBT glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze or Brass

Electrical

Current Rating : 1Amp
 Contact Resistance : 30 m ohms max.
 Insulation Resistance : 3000 M ohms min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40° ~ +105°

► Flat ribbon cable with 1.0mm pitch.

ELECTRONIC
COMPONENTS