




# DEGSON ELECTRONICS CO., LTD.

## Product Specification



**2EDGKCM-5.0**  
**2EDGKCM-5.08 2EDGKCM-7.62**

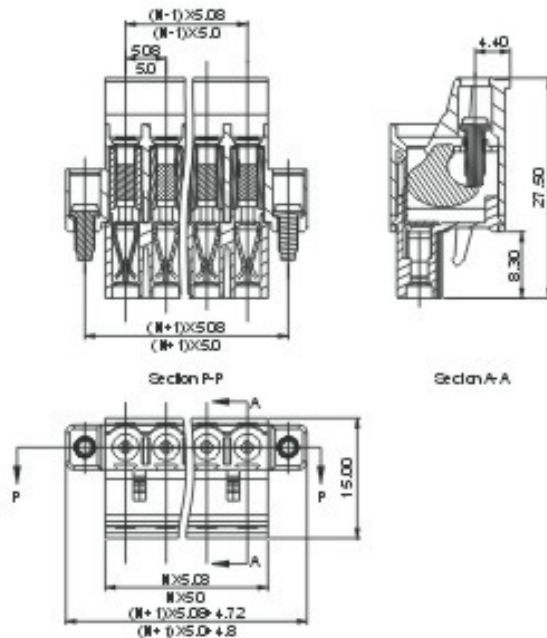


| Approval              | UL           | CE                 |
|-----------------------|--------------|--------------------|
| <b>Electrical</b>     |              |                    |
| Standard              | UL           | IEC                |
| Rated voltage         | 300V         | 320V, 400V         |
| Rated current         | 10A          | 20A                |
| Wire range            | 28-12AWG     | 2.5mm <sup>2</sup> |
| With standing voltage | AC2500V/1Min |                    |

| <b>Mechanical</b>   |                    |
|---------------------|--------------------|
| Torque              | 0.4N.m (3.5Lb-In.) |
| Ambient temperature | -40°C ~ +105°C     |
| Strip length        | 10mm               |

| <b>Dimensions</b> |   |
|-------------------|---|
| Pitch             | 5.0mm (.197") 5.08mm (.200") 7.62mm (.300") |
| Poles             | 2P-24P 2P-12P                               |

| <b>Material</b> |  |
|-----------------|--|
| Housing         | PA66, UL94V-0                          |
| Screws          | M2.5 steel, Cr <sup>3+</sup> Zn plated |
| Contact         | Phosphor bronze                        |
| Cage            | Brass, Ni plated                       |

### HOW TO ORDER

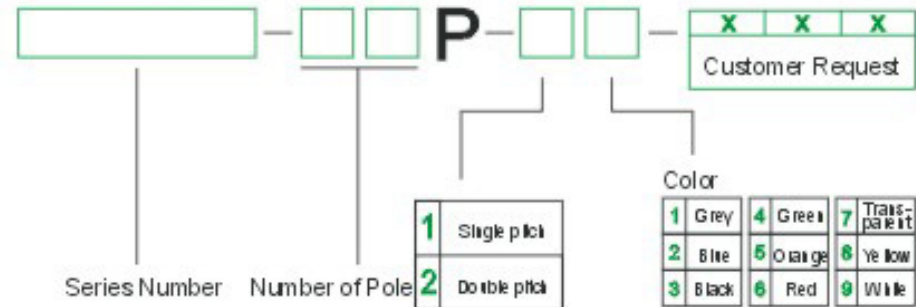

|  |   |
|--|---|
|  | <b>DEGSON ELECTRONICS CO., LTD.</b>                                   |
|  | <b>NAME</b><br><b>2EDGKCM-5.0</b><br><b>2EDGKCM-5.08 2EDGKCM-7.62</b> |