


H1500 Series 1.5mm Crimp Terminal Housing



H	1500	—	02	P	W	0	0	0	0
1	2		3	4	5	6	7	8	9
1. PRODUCTS: H:Housing			4. CONTACT TYPE: P:Non Distribution			7. FILL IT WITH "0"			
2. SERIES NO.: 1500			5. INSULATOR COLOR: W:White			8. FILL IT WITH "0"			
3. CONTACT NO.: 02-13			6. FILL IT WITH "0"			9. FILL IT WITH "0"			

1 H1500-XXPW000R 1.50mm HOUSING XXP

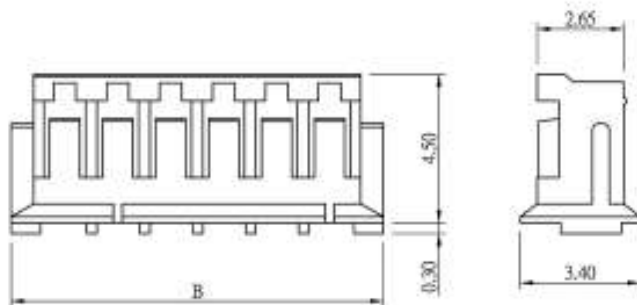

SPECIFICATIONS

Current rating : 1A AC,DC
Voltage rating : 100V AC,DC
Temperature range : -25°C to +85 °C
Contact resistance : 20mΩ Max.
Insulation resistance : 500MΩ Min.
Withstanding voltage : 500V AC/minute
Material : Nylon 66, UL94V-0

Ordering Information & Dimensions


Poles	Dimension (mm)	
	A	B
2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	10.50
7	9.00	12.00
8	10.50	13.50
9	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00

T1500 Series 1.5mm Crimp Contacts



T	1500	—	T	P	P	0	0	0	0	0
1	2		3	4	5	6	7	8	9	10
1. PRODUCTS: T:Terminal			4. MATERIAL: P:Phosphor Bronze			7. FILL IT WITH "0"				
2. SERIES NO.: 1500			5. WIRE OPTION: P:Suitable For 28-32 Awg N:Suitable For 26-30 Awg			8. FILL IT WITH "0"				
3. CONTACT PLATING: T:Tin S:Selective Gold G:Gold Flash			6. FILL IT WITH "0"			9. FILL IT WITH "0"				
						10. FILL IT WITH "0"				

1

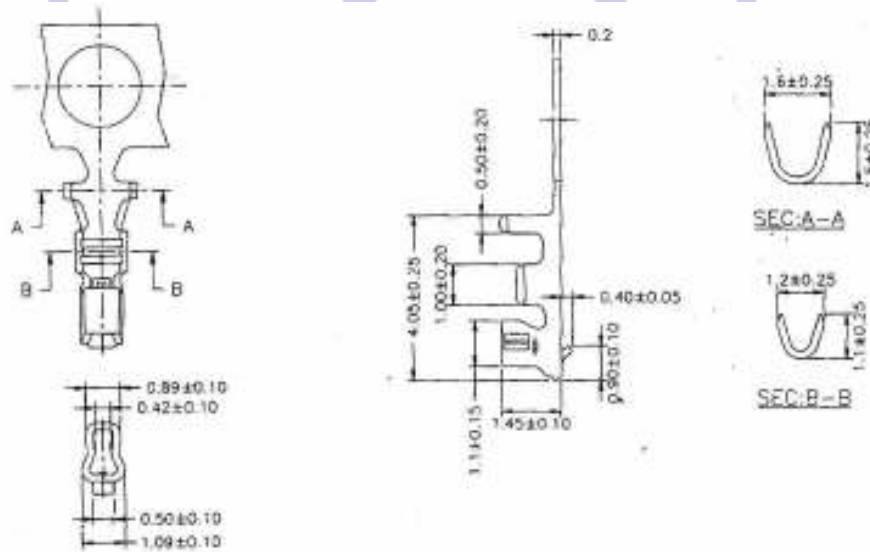T1500-TPN00000R**JST ZH 1.50mm TERMINAL PHOSPHOR BRONZE MATERIAL FOR 26~30AWG****Specifications & Ordering Information:**

Material	Wire Range	Insulation O.D.	Finish	Qty/reel
Phosphor Bronze	AWG #26~30	/.J mm	Tin-Plated	15000PCS

RoHS Compliant

ELECTRONIC
COMPONENTS