




# DEGSON ELECTRONICS CO., LTD.

## Product Specification



**DG500BB-5.0**  
**DG500BB-5.08**

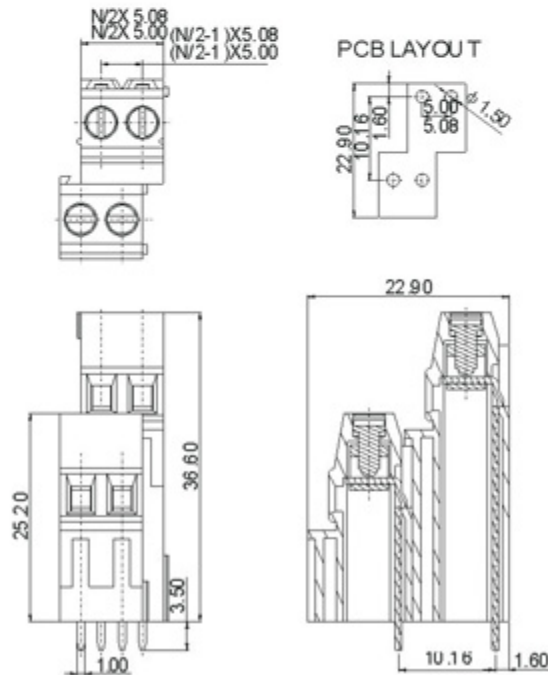


<b>Approval</b>		
<b>Electrical</b>		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	20A	24A
Wire range	28-12AWG	2.5mm <sup>2</sup>
With standing voltage	AC2000V/1Min	

<b>Mechanical</b>	
Torque	0.4Nm(3.5Lb-In.)
Ambient temperature	-40°C~+105°C
Strip length	7mm
<b>Dimensions</b>	
Pitch	5.0mm(.197")/5.08mm(.200")
Poles	2*(2P,3P-24P)

<b>Material</b>	
Housing	PA66, UL94V-0
Screws	M2.5, steel, Cr <sup>3+</sup> Zn plated
Pin header	Brass, Tin plated
Cage	Brass, Ni plated

### HOW TO ORDER

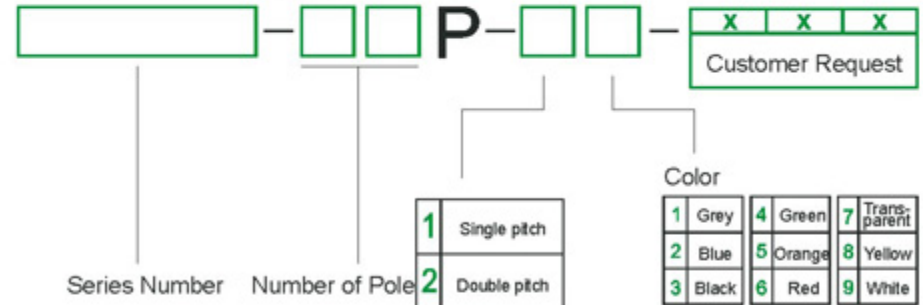

		DEGSON ELECTRONICS CO., LTD.
	NAME	<b>DG500BB-5.0</b> <b>DG500BB-5.08</b>