






DEGSON ELECTRONICS CO., LTD.

Product Specification



HT508K-5.08

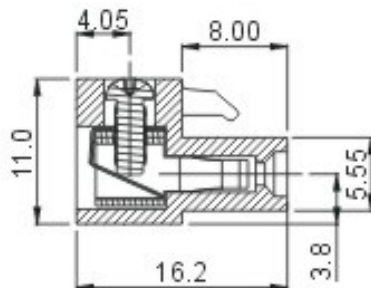

Approval	UL	CE
Electrical		
Standard	UL	IEC
Rated voltage	150V	320V
Rated current	12A	20A
Wire range	24-12AWG	2.5mm ²
With standing voltage	AC2500V/1Min	

Mechanical	
Torque	0.4Nm (3.5Lb-In.)
Ambient temperature	-40°C~+105°C
Strip length	7mm
Dimensions	
Pitch	5.08mm (.200")
Poles	2P-24P

Material	
Housing	PA66, UL94V-0
Screws	M2, steel, Cr ⁺ Znplated
Contact	Phosphor bronze
Wire guard	Phosphor bronze, Ni plated

HOW TO ORDER

HT508K-5.08 — **P** — — Customer Request

Series Number Number of Pole Color

1 Single pitch	4 Green	7 Transparent
2 Double pitch	5 Orange	8 Yellow
	6 Red	9 White

	DEGSON ELECTRONICS CO., LTD.
	NAME HT508K-5.08