





DEGSON ELECTRONICS CO., LTD.

Product Specification

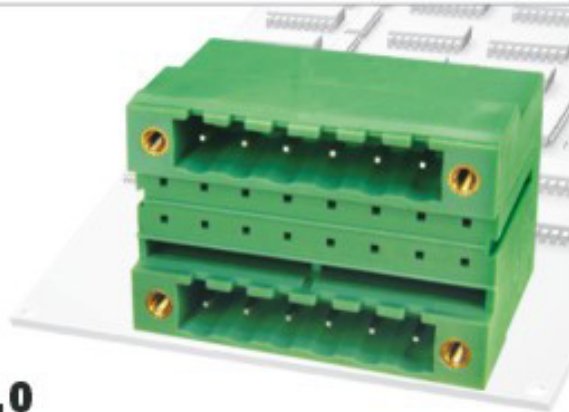


2EDGRHM-5.0
2EDGRHM-5.08

| | | |
|-----------------------|------------------------------|------|
| Approval | | |
| Electrical | | |
| Standard | UL | IEC |
| Rated voltage | 300V | 320V |
| Rated current | 15A | 10A |
| With standing voltage | AC 2500V/1 Min | |
| Mechanical | | |
| Ambient temperature | -40°C ~ +105°C | |
| Dimensions | | |
| Pitch | 5.0mm (.197") 5.08mm (.200") | |
| Poles | 2*(2P-22P) | |
| Material | | |
| Housing | PA66, UL94V-0 | |
| Pin header | Brass, Tin plated | |
| Nut | M 2.5, Brass | |

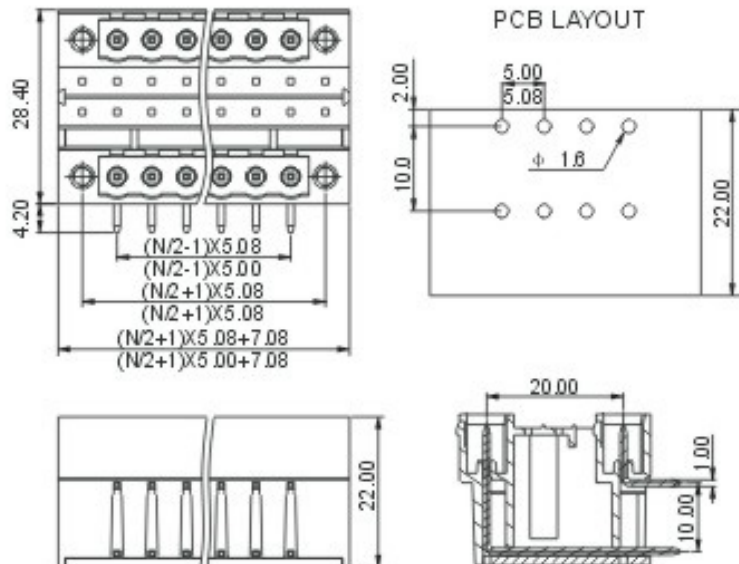

HOW TO ORDER

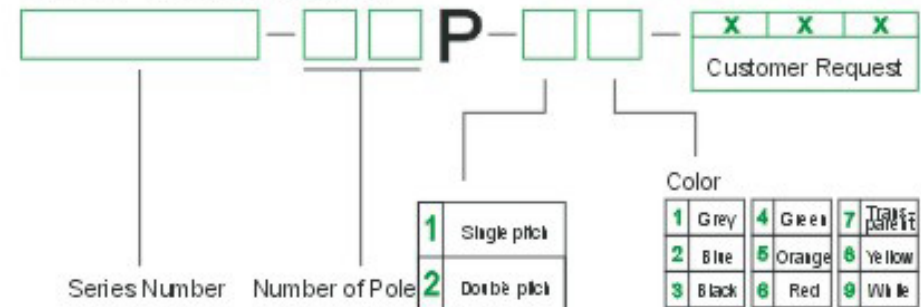

| | |
|--|--|
| | DEGSON ELECTRONICS CO., LTD. |
| | NAME 2EDGRHM-5.0 2EDGRHM-5.08 |