





**1**  
**C8305-XXASXJB0R**  
**DIP SWITCH R/A TYPE LONG KEY**

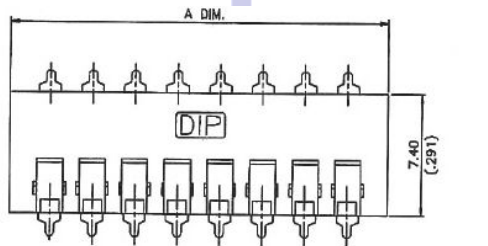

NOTE:  
 1. ALL DIMENSIONS ARE MILLIMETERS.  
 BRACKETED DIMENSIONS ARE IN INCHES.  
 2. GENERAL TOLERANCES: DECIMAL DIMENSIONS ±0.20(.008)  
 3. MATERIAL: SEE PAGE 8 OF 8.



RECOMMEND PCB LAYOUT

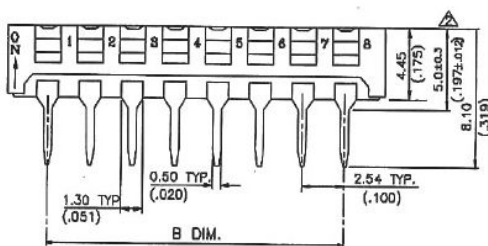

SCHEMATIC (TYP.)  
 (8 THROUGH 18 POS. AVAIL)

12	32.77 (1.290)	27.94 (1.100)
#10	27.69 (1.090)	22.86 (.900)
9	26.16 (.990)	20.32 (.800)
#8	22.61 (.890)	17.78 (.700)
7	20.07 (.790)	15.24 (.600)
#6	17.53 (.690)	12.70 (.500)
5	14.99 (.590)	10.16 (.400)
#4	12.45 (.490)	7.62 (.300)
3	9.91 (.390)	5.08 (.200)
#2	7.37 (.290)	2.54 (.100)
POS NO	A DIM.	B DIM.

\* AVAILABLE

**ORDER INFORMATION**

C8305—

Contact No.	<input type="text" value="10"/>	Solder Type	<input type="text" value="A"/>	Key Option	<input type="text" value="S"/>	Tape Sealed Option	<input type="text" value="N"/>	Contact Plating	<input type="text" value="J"/>	Insulator Color	<input type="text" value="B"/>	<input type="text" value="0"/>
	02-10		A: Splay Terminal		S: Short Key		Y: W/Tape Sealed N: W/O Tape Sealed		J: Gold 3UF		B: Black	FIL It With '0'

ELECTRONIC COMPONENTS