


H7066 Series 2.54mm Crimp Terminal Housing

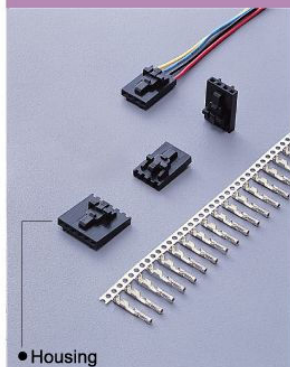

H **7066** — **02** **P** **B** **0** **0** **0** **0**

1 2 3 4 5 6 7 8 9

- | | | |
|---|---|---------------------|
| 1. PRODUCTS:
H:Housing | 4. CONTACT TYPE:
P:Non Distribution | 7. FILL IT WITH "0" |
| 2. SERIES NO.:
7066
(With Locking Ribs) | 5. INSULATOR COLOR:
B:Black
W:White | 8. FILL IT WITH "0" |
| 3. CONTACT NO.:
02-25 | 6. FILL IT WITH "0" | 9. FILL IT WITH "0" |

(Terminal:Match with T7058 Series)

1




H7066-XXPB000R

MX2.54mm HOUSING XXP

- * Poles:2-25
- * Material:PBT UL94V-0 ,BLACK

Specifications

- * Current rating: 2.5A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 800V AC/minute



CIRCUITS	DIMENSION in.(mm)		CIRCUITS	DIMENSION in.(mm)	
	A	B		A	B
2	0.100(2.54)	0.205(5.2)	14	1.300(33.02)	1.409(35.8)
3	0.200(5.08)	0.307(7.8)	15	1.400(35.54)	1.508(38.3)
4	0.300(7.62)	0.406(10.3)	16	1.500(38.10)	1.610(40.9)
5	0.400(10.16)	0.508(12.9)	17	1.600(40.64)	1.709(43.4)
6	0.500(12.70)	0.606(15.4)	18	1.700(43.18)	1.811(46.0)
7	0.600(15.24)	0.709(18.0)	19	1.800(45.72)	1.909(48.5)
8	0.700(17.78)	0.807(20.5)	20	1.900(48.26)	2.012(51.1)
9	0.800(20.32)	0.909(23.1)	21	2.000(50.80)	2.110(53.6)
10	0.900(22.86)	1.008(25.6)	22	2.100(53.34)	2.213(56.2)
11	1.000(25.40)	1.108(28.1)	23	2.200(55.88)	2.311(58.7)
12	1.100(27.94)	1.209(30.7)	24	2.300(58.42)	2.409(61.2)
13	1.200(30.48)	1.307(33.2)	25	2.400(60.96)	2.512(63.8)

ELECTRONIC COMPONENTS