






DEGSON ELECTRONICS CO., LTD.

Product Specification



2EDGKA-5.0 2EDGKA-5.08
2EDGKA-7.5 2EDGKA-7.62

NX7.62-1.8
 NX7.50-1.8
 NX5.08
 NX5.00

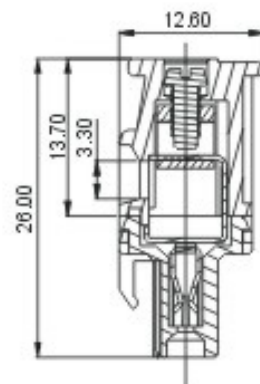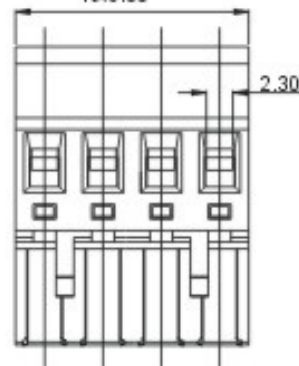


| Approval | | |
|-----------------------|--------------|--------------------|
| Electrical | | |
| Standard | UL | IEC |
| Rated voltage | 300V | 320V, 400V |
| Rated current | 15A | 10A |
| Wire range | 28-12AWG | 2.5mm ² |
| With standing voltage | AC2500V/1Min | |

| Mechanical | |
|---------------------|--------------------|
| Torque | 0.4N.m (3.5Lb-In.) |
| Ambient temperature | -40°C~+105°C |
| Strip length | 7mm |

| Dimensions | |
|-------------------|---|
| Pitch | 5.0mm (.197") 5.08mm (.200") 7.5mm (.295") 7.62mm (.300") |
| Poles | 2P -24P 2P -12P |

| Material | |
|-----------------|--|
| Housing | PA66, UL94V-0 |
| Screws | M2.5 steel, Cr ³⁺ Zn plated |
| Contact | Phosphor bronze |
| Cage | Brass, Ni plated |

HOW TO ORDER

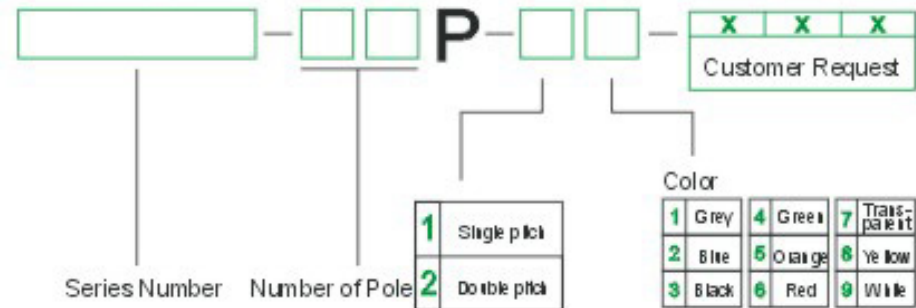

| | | | |
|--|------|-------------------------------------|----------------------------------|
| | | DEGSON ELECTRONICS CO., LTD. | |
| | NAME | 2EDGKA-5.0 2EDGKA-5.08 | 2EDGKA-7.5 2EDGKA-7.62 |